


COURAGE MK II



Trade name **COURAGE MKII**
 Type **Microphone Cable**
 Size **24AWG x 2C**
 Document # **F001 - 091216**

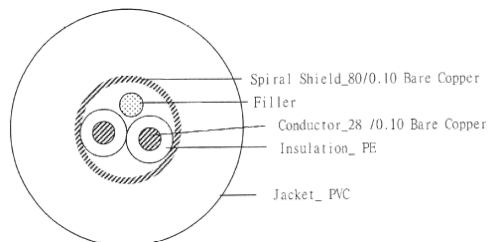

COMPOSITION

Construction	24AWGx2C + cotton tread + Spiral Shield	
Conductor	AWG/Cross Sec. Area	24/0.22 mm ²
	Material	Bare copper
	Construction	28/ 0.10±0.008 mm
	Insulation	PE
Insulation	Std. Thickness	0.36 mm
	Min. Thickness	0.31 mm
	Diameter	1.35±0.05 mm
	Material	PE
Filler	Color	Blue/Red
	Diameter	---
	Material	Cotton thread
	Shield	Bare Copper
Shield	Construction	Spiral 80/0.10±0.008 mm
	Coverage	80% min
	Std. Thickness	1.80 mm
	Min. Thickness	-
Jacket	Overall diameter	6.50±0.20 mm
	Material	PVC
	Color	Black (BLK), Blue (BLU), Red (RED)

ELECTRICAL & PHYSICAL PROPERTIES

Conductor resistance	82.40 Ω/km @20°C max.
Shield resistance	---
Nom. Capacitance cond./cond.	---
Nom. Capacitance shield/cond.	---
Temperature Rating	-20°C ~ +80°C
Cold bend test	18±3 seconds for six turns at -20,0°C±2,0°C / 4h

Inscription

MrCable · COURAGE MK II · Instrument Cable · Highflex · shielded · for stage application · 2x0,22 mm2 (AWG24)



COURAGE MK II			
Note	REV	DESCRIPTION	DATE
	0	Product release	2009/12/28
	1	MrCable COURAGE MKII · High Flexible Low Noise Microphone Cable · 2x0,22 mm2 (AWG24)	2022/08/07

Supervisor: _____
Date

Inspect: _____
Date