


VULCAN P26

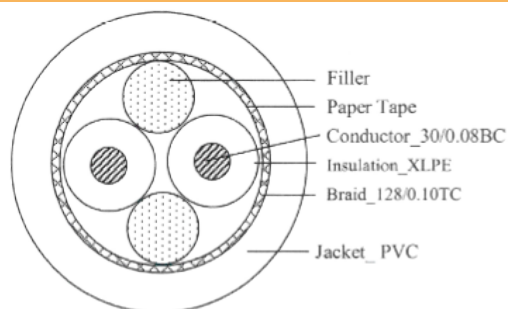

Trade name **VULCAN P26**
 Type **Microphone Cable**
 Size **25AWG x 2C**
 Document # **F001 -091204**

COMPOSITION

COMPOSITION		25AWGx2C + Filler + Cotton Thread + Braided Shield
Construction		
Conductor	AWG/Cross Sec. Area	26/0.15 mm ²
	Material	Bare copper
	Construction	30/0.08±0.008 mm
Insulation	Std. Thickness	0.30 mm
	Min. Thickness	0.25 mm
	Diameter	1.10±0.05 mm
	Material	XLPE
	Color	White/Blue
Filler	Diameter	--
	Material	Cotton thread
Shield	Material	Tinned copper
	Construction	Braided 128/0.10±0.008 mm
	Coverage	95% min
Jacket	Std. Thickness	0.85 mm
	Overall diameter	4.50±0.15 mm
	Material	PVC
	Color	Black (BLK), Blue (BLU), Green (GRN), Red (RED)

ELECTRICAL & PHYSICAL PROPERTIES

Conductor resistance	60.1 Ω/km @20°C max
Shield resistance	--
Nom. Capacitance cond./cond.	--
Nom. Capacitance shield/cond.	--
Temperature Rating	-30°C ~ +80°C
Cold bend test	18±3 seconds for six turns at -30,0°C±2,0°C / 4h

Inscription

MrCable VULCAN P26 · High Performance Low Noise Microphone Cable · 2x0,15mm² (AWG25)



VULCAN P26

Note	REV	DESCRIPTION	DATE
	0	Product release	2009/12/17
	1	Marking: MrCable VULCAN P26 · High Performance Low Noise Microphone Cable · 2x0,15mm ² (AWG25)	2022/8/7

Supervisor: _____
Date

Inspect: _____
Date