
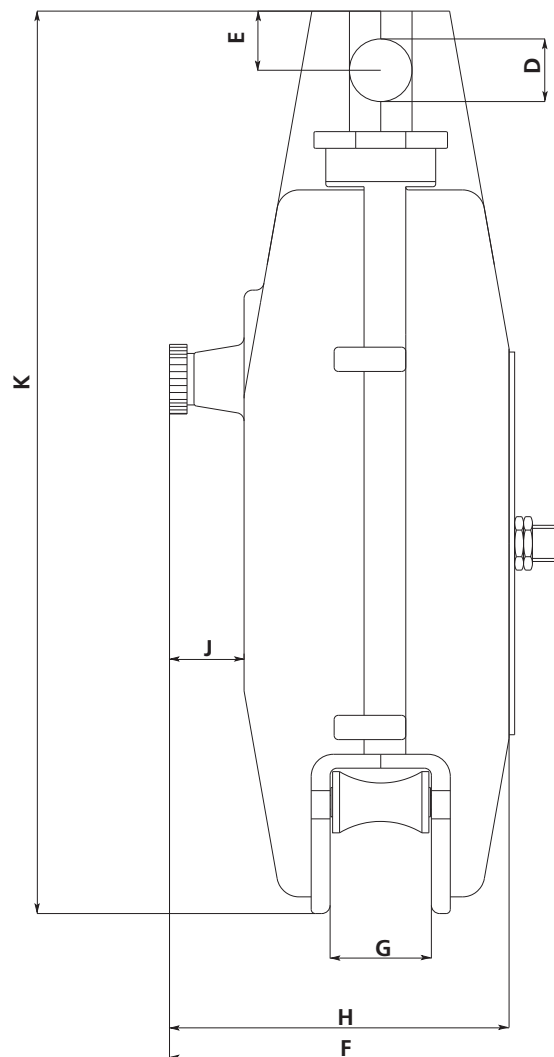


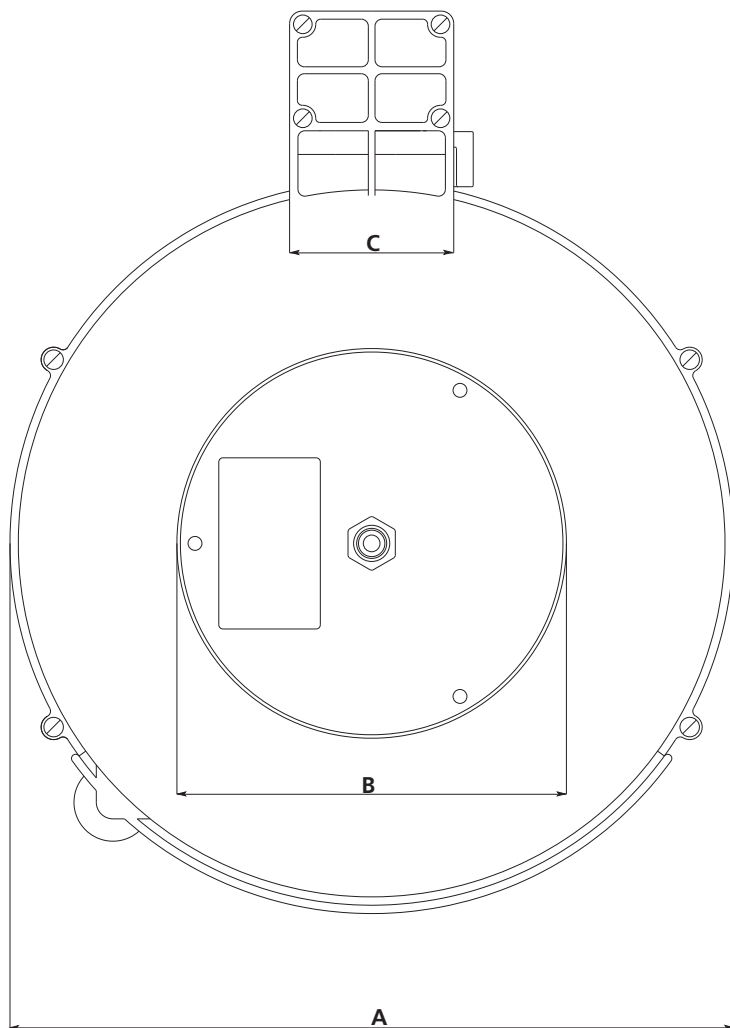

## ST 260

hose winder stable plastic case  
locking device can be turned off  
rustfree turn clutch  
with 6,5m extension hose polyurethane NW 6  
without connecting hose  
with wall or ceiling bracket

| Order-No.      | Weight             |
|----------------|--------------------|
| 645 06 080 000 | 2.40 kg<br>5.40 lb |

# CE IP40

### Measures in mm / inch

|                       |                      |
|-----------------------|----------------------|
| <b>A:</b> 260 / 10,24 | <b>G:</b> 36 / 1,42  |
| <b>B:</b> 140 / 5,51  | <b>H:</b> 122 / 4,8  |
| <b>C:</b> 60 / 2,36   | <b>J:</b> 26 / 1,02  |
| <b>D:</b> 22 / 0,87   | <b>K:</b> 325 / 12,8 |
| <b>E:</b> 22 / 0,87   |                      |
| <b>F:</b> 142 / 5,59  |                      |



**Schill GmbH & Co. KG**  
Bruckstr. 44  
70734 Fellbach/Germany

Phone: +49 (0) 711 57 88 07-0  
Fax: +49 (0) 711 57 88 07-44  
info@schill.de  
www.schill.de