


[WIRING DIAGRAM]

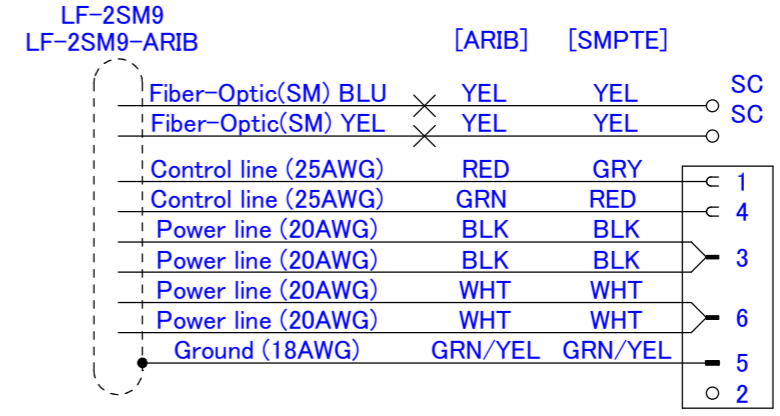

※Clamp the nylon connector with a special tool made of AMP.
26-22AWG : 91529-1 • 20(x2)-16AWG : 91536-1

GROSS (kg)	2.30
NET (kg)	1.35

ITEM	DESCRIPTION	P/N	QTY	REMARKS	SCREW
<Accessories>	Fiber-optic patch cord	FS2C02A-SS	4	Canare (2m) RL076, φ2mm Color:BLU short boots	
	Splice holder	JPNSCLFOP01	2	TEREGAERTNER	
	Fusion splice protection sleeves	S922	10	FURUKAWA 40mm	
	Nylon connector	172160-1	4	AMP	
	Socket contact	170365-1	12	AMP 26-22AWG	
	Pin contact	171638-1	16	AMP 20(x2)-16AWG	
	Cable tie bands	T18S	4	Nylon Color: BLK	
	Ground cable	UL1007 18AWG	2m	Color:GRN/YEL	
	Identification Tube	LM-TU336	each1	Indication: 1~8	
10	Laser attention seal	ISO-D-S	1	KCC	
9	SC Adapter	JIS C 5973	8	Plastic body Color:BLU	Cross pan head M2x6 SUS
8	Fusion Tray	JPNSCLFOP05	2	TEREGAERTNER	Cross binding head M3x6 Fe/Ni
	Fusion Tray over	JPNSCLFOP02	1	TEREGAERTNER	
	Knureing Knob	NOM 5	1	SUM23/Chrome plating	Cross pan head M5x20 SUS, W
	Tray Stand	M-JAE01	1	SPCC t1.6 Ep-Fe/Zn5/CM2	Cross countersunk head M3x6 Fe/Ni
7	TM Clamp with insulation	CVDB-410E	4	Brass/Ni plating(Cd lose) POM	Cross countersunk head M4x6 Reny Cross binding head M4x6
6	Cable Clamp	SL-6N	4	SHINAGAWA SHOKO	Cross pan head screw with captive washer M3x8 Fe/Ni
	Clamp Stand	M-JAE02	2	SPCC t2.0 Ep-Fe/Zn5/CM2	Cross binding head M3x6 Fe/Ni
	Spacer	ST-303	4	HIROSUGI-KEIKI	
5	Flame-retarded Grommet	C-30-SG-16A	4	TAKIGEN	
4	Connector Cover	M-UPE05	1	A5052 t1.2 SLG-2039	Cross countersunk head M3x6 Fe/Ni
3	Mounting Panel	M-MAE01	2	SPCC t1.2 SLG-2039	Cross binding head M3x6 Fe/Ni
2	Cover	M-UPE02	1	A5052 t1.2 SLG-2039	Cross countersunk head M3x6 Fe/Ni
1	Case	M-CBE02	1	SPCC t1.2 SLG-2039	

TITLE	Hybrid Fiber-Optic Splice Enclosure	PJTN	UNIT	SCALE	TOL.	DATE	Ver 1.9	MODEL	DRW .No.
			mm	1:2	-	2017-07-31	FCE-4		SL002E