


VULCAN Q24



Trade name **VULCAN Q24**
 Type **Star Quad Microphone Cable**
 Size **24AWG x 4C**
 Document # **F001 -091207**

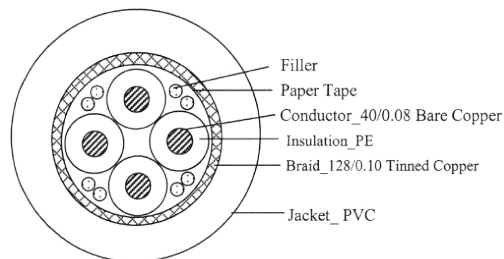

COMPOSITION

Construction	24AWGx4C + Filler + Cotton Tread, Paper Tape	
Conductor	AWG/Cross Sec. Area	24/0.20 mm ²
	Material	Bare copper
	Construction	40/0.08±0.008 mm
Insulation	Std. Thickness	0.38 mm
	Min. Thickness	0.32 mm
	Diameter	1.35±0.05 mm
	Material	XLPE
	Color	White/Blue
Filler	Diameter	---
	Material	Cotton thread
Shield	Material	Tinned copper
	Construction	128/0.10±0.008 mm
	Coverage	95% min
Jacket	Std. Thickness	0.96
	Min. Thickness	---
	Overall diameter	5.8±0.15 mm
	Material	PVC
	Color	Black

ELECTRICAL & PHYSICAL PROPERTIES

Conductor resistance	90.1 Ω/km @20°C max
Shield resistance	---
Nom. Capacitance cond./cond.	---
Nom. Capacitance shield/cond.	---
Temperature Rating	-30°C ~ +80°C
Cold bend test	18±3 seconds for six turns at -30,0°C±2,0°C / 4h

Inscription

MrCable VULCAN Q24 · High Performance STAR QUAD Microphone Cable · 4x0,20 mm² (AWG24)



VULCAN Q24

Note	REV	DESCRIPTION	DATE
	0	Product release	2009/12/21
	1	Marking: MrCable VULCAN Q24 · High Performance STAR QUAD Microphone Cable · 4x0,20 mm ² (AWG24)	2022/8/7

Supervisor: _____
Date

Inspect: _____
Date